

DAIKIN ROOM AIR CONDITIONER

OPERATION MANUAL

INVERTER

MODELS

- ☒ FTXF25QVMA
- ☒ FTXF35QVMA
- ☒ FTXF50QVMA



Feature

For your comfort and energy saving



INTELLIGENT EYE

The INTELLIGENT EYE sensor detects the human movement in a room. If no one is in the room more than 20 minutes, the operation automatically changes to energy saving operation.

►Page 14

Other functions



COMFORT AIRFLOW

The airflow direction is upward while in COOL operation, and downward while in HEAT operation. This function prevents cold or warm air from blowing directly on your body.

►Page 13



OUTDOOR UNIT QUIET

OUTDOOR UNIT QUIET operation lowers the noise level of the outdoor unit. This function is useful when you need to consider the noise for your neighbourhood. ►Page 19













Contents

■ Read before Operation

Safety Precautions	3
Name of Parts	5
Preparation before Operation	8

■ Operation

 AUTO · DRY · COOL · HEAT. FAN Operation	9
 Adjusting the Airflow Direction	11
 Adjusting the Airflow Rate	12
 COMFORT AIRFLOW Operation.....	13
 INTELLIGENT EYE Operation.....	14
 POWERFUL Operation	16
 ECONO Operation.....	17
 OUTDOOR UNIT QUIET Operation.....	19
 OFF TIMER Operation.....	20
 ON TIMER Operation.....	21

■ Care

Care and Cleaning	22
-------------------------	----

■ Troubleshooting

Troubleshooting	27
-----------------------	----





ECONO






This function enables efficient operation by limiting the maximum power consumption. It is useful when using the air conditioner and other electrical devices simultaneously. ▶Page 17

Safety Precautions

	Read the precautions in this manual carefully before operating the unit.		This appliance is filled with R32.
---	--	---	------------------------------------


- Keep this manual where the user can easily find it.
- The precautions described herein are classified as WARNING and CAUTION. They both contain important information regarding safety. Be sure to observe all precautions without fail.




 WARNING	 CAUTION
Failure to follow these instructions properly may result in personal injury or loss of life.	Failure to follow these instructions properly may result in property damage or personal injury, which may be serious depending on the circumstances.

 Never attempt.	 Be sure to follow the instructions.	 Be sure to establish an earth connection.
 Never touch the air conditioner nor the remote controller with wet hands.	 Never wet the air conditioner nor the remote controller	


- After reading, keep this manual in a convenient place so that you can refer to it whenever necessary. If the equipment is transferred to a new user, be sure also to hand over the manual.

WARNING

-  Do not use means to accelerate the defrosting process or to clean, other than those recommended by the manufacturer.
- The appliance must be stored in a room without continuously operating ignition sources (for example: open flames, an operating gas appliance or an operating electric heater).
- Do not pierce or burn.
- Be aware that refrigerants may not contain an odour.
- The appliance must be installed, operated and stored in a room with a floor area larger than 3.90m².
- To avoid fire, explosion or injury, do not operate the unit when harmful gases (e.g. flammable or corrosive) are detected near the unit.
- Be aware that prolonged, direct exposure to cool or warm air from the air conditioner, or to air that is too cool or too warm, can be harmful to your physical condition and health.
- Do not place objects, including rods, your fingers, etc., in the air inlet or outlet. Product damage or personal injury may result due to contact with the air conditioner's high-speed fan blades.
- Do not attempt to repair, dismantle, reinstall or modify the air conditioner yourself as this may result in water leakage, electric shocks or fire hazards.
- Do not use flammable spray near the air conditioner, or otherwise fire may result.
- When the air conditioner is malfunctioning (giving off a burning odour, etc.) turn off power to the unit and contact your local dealer. Continued operation under such circumstances may result in a failure, electric shocks or fire hazards.
- Do not use a refrigerant other than the one indicated on the outdoor unit (R32) when installing, moving or repairing. Using other refrigerants may cause trouble or damage to the unit, and personal injury.


-  To avoid electric shocks, do not operate with wet hands.
-  Beware of fire in case of refrigerant leakage. If the air conditioner is not operating correctly, i.e. not generating cool or warm air, refrigerant leakage could be the cause. Consult your dealer for assistance. The refrigerant within the air conditioner is safe and normally does not leak. However, in the event of a leakage, contact with a naked burner, heater or cooker may result in generation of noxious gas. Do not use the air conditioner until a qualified service person confirms that the leakage has been repaired.
- Do not attempt to install or repair the air conditioner yourself. Improper workmanship may result in water leakage, electric shocks or fire hazards. Please contact your local dealer or qualified personnel for installation and maintenance work.
- If the air conditioner is malfunctioning (giving off a burning odour, etc.), turn off power to the unit and contact your local dealer. Continued operation under such circumstances may result in a failure, electric shocks or fire hazards.
- Be sure to install an earth leakage circuit breaker. Failure to install an earth leakage circuit breaker may result in electric shocks or fire.
-  Be sure to earth the unit. Do not earth the unit to a utility pipe, lightning conductor or telephone earth lead. Imperfect earthing may result in electric shocks.

CAUTION

-  Do not use the air conditioner for purposes other than those for which it is intended. Do not use the air conditioner for cooling precision instruments, food, plants, animals or works of art as this may adversely affect the performance, quality and/or longevity of the object concerned.
- Do not expose plants or animals directly to the airflow from the unit as this may cause adverse effects.
- Do not place appliances that produce naked flames in places exposed to the airflow from the unit as this may impair combustion of the burner.

CAUTION



- Do not block the air inlets nor outlets. Impaired airflow may result in insufficient performance or trouble.
 - Do not sit on the outdoor unit, put things on the unit, or pull the unit. Doing so may cause accidents, such as falling or toppling down, thus resulting in injury, product malfunctioning, or product damage.
 - Do not give impact to the indoor and outdoor units, or otherwise product damage may result.
 - Do not place objects that are susceptible to moisture directly beneath the indoor or outdoor units. Under certain conditions, condensation on the main unit or refrigerant pipes, air filter dirt or drain blockage may cause dripping, resulting in fouling or failure of the object concerned.
 - After prolonged use, check the unit stand and its mounts for damage. If they are left in a damaged condition, the unit may fall and cause injury.
 - To avoid injury, do not touch the air inlet or aluminium fins of the indoor or outdoor units.
 - The appliance is not intended for use by unattended young children or infirm persons. Impairment of bodily functions and harm to health may result.
 - Children should be supervised to ensure that they do not play with the unit or its remote controller. Accidental operation by a child may result in impairment of bodily functions and harm health.
 - Do not place flammable items, such as spray cans, within 1m of the air outlet.
The spray cans may explode as a result of hot air from the indoor or outdoor units.
 - Be careful not to let pets urinate on the air conditioner. Urination on the air conditioner may result in electric shocks or fire.
 - Do not sit or hang on the panel. The panel may fall, and injury or product malfunctioning may result.
 - Do not sway the panel. The panel may hit people or objects, and injury or property damage may result.
 - Do not let children play around the panel. Injury or property damage may result.
 - Do not pull the wires. The wires may be broken and the panel may fall, and injury or property damage may result.
 - Do not locate obstacles in the route. The panel may fall, and injury or property damage may result.
 - Do not bend or damage the wires. The wires may be broken and the panel may fall, and injury or property damage may result.
 - Do not wash the air conditioner with water, as this may result in electric shocks or fire.
 - Do not place water containers (vases, etc.) above the unit, as this may result in electric shocks or fire hazards if they should topple over.
 - Do not put objects on the panel, or otherwise production malfunctioning may result.
 - Do not use an unstable stand at the time of operating or maintaining the air conditioner, or otherwise you may topple over or injury yourself.
 - Locate the remote controller in places out of reach of children. The wrong operation of the remote controller may result in injury.
-  To avoid oxygen depletion, ensure that the room is adequately ventilated if equipment such as a burner is used together with the air conditioner.
- Before cleaning, be sure to stop unit operation and turn off the circuit breaker. Otherwise, an electric shock and injury may result.
 - Only connect the air conditioner to the specified power supply circuit. Power supplies other than the one specified may result in electric shocks, overheating and fires.
 - Arrange the drain hose to ensure smooth drainage. Imperfect drainage may cause wetting of the building, furniture, etc.
 - Do not place objects in direct proximity of the outdoor unit and do not let leaves and other debris accumulate around the unit. Leaves are a hotbed for small animals which can enter the unit. Once inside the unit, such animals can cause malfunctions, smoke or fire if they come into contact with electrical parts.
 - Do not place objects around the indoor unit.
Doing so may have an adverse influence on the performance, product quality, and life of the air conditioner.

Installation site

- To install the air conditioner in the following types of environments, consult your dealer.
 - Places with an oily environment or where steam or soot occurs.
 - Salty environments such as coastal areas.
 - Places where sulphide gas occurs such as hot springs.
 - Places where snow may block the outdoor unit.
- Be sure to follow the instructions below.
 - The indoor unit is at least 1m away from any television or radio set (unit may cause interference with the picture or sound).
 - The drain from the outdoor unit must be discharged to a place of good drainage.

Consider nuisance to your neighbours from noises

- For installation, choose a place as described below.
 - A place solid enough to bear the weight of the unit and which does not amplify the operation noise or vibration.
 - A place from where the air discharged from the outdoor unit or the operation noise will not annoy your neighbours.

Electrical work


- For the power supply, be sure to use a separate power circuit dedicated to the air conditioner.

System relocation


- Relocating the air conditioner requires specialized knowledge and skills. Please consult your dealer if relocation is necessary for moving or remodelling.

Name of Parts


Indoor Unit

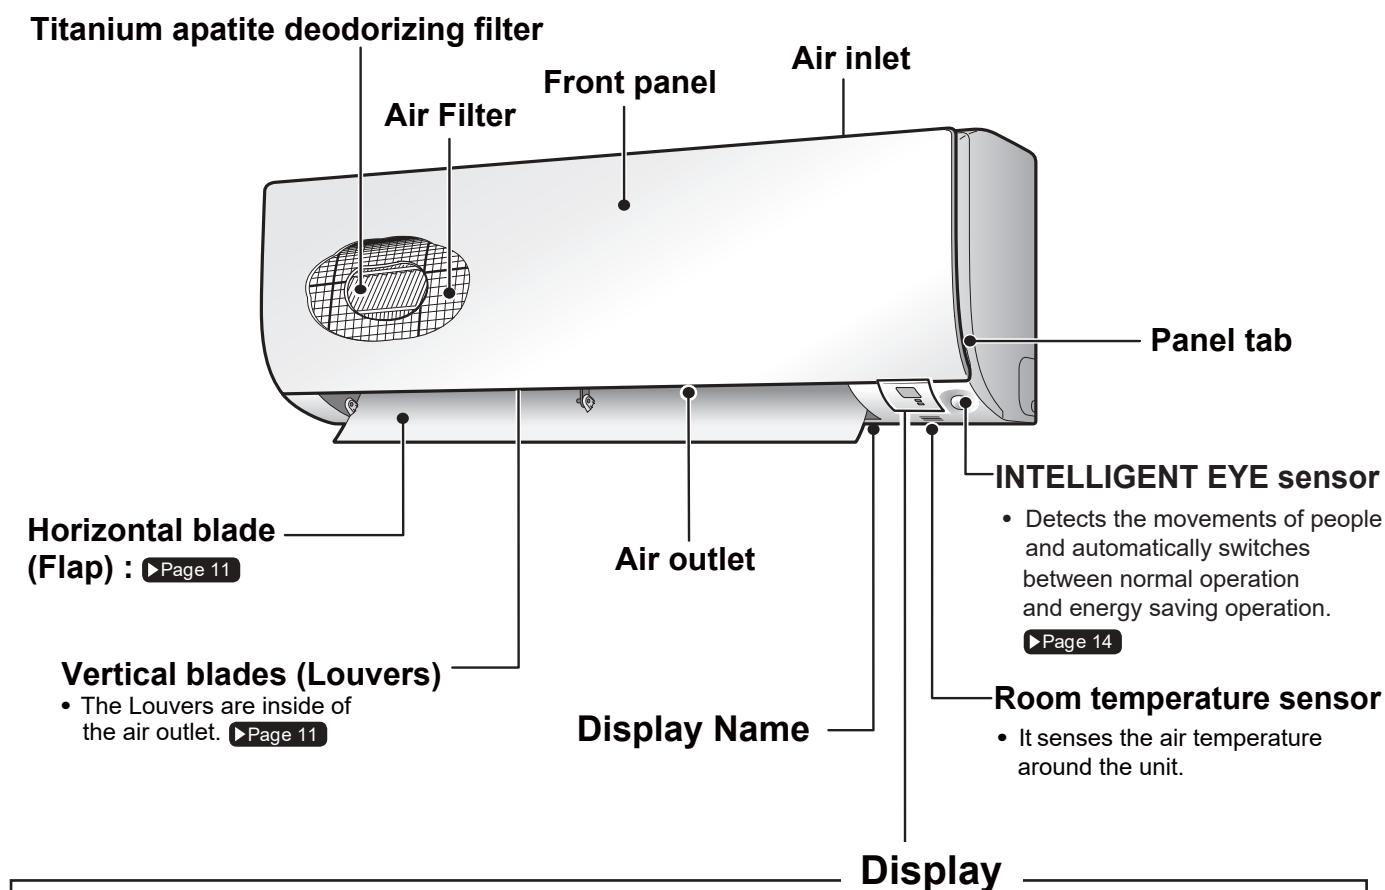

Display

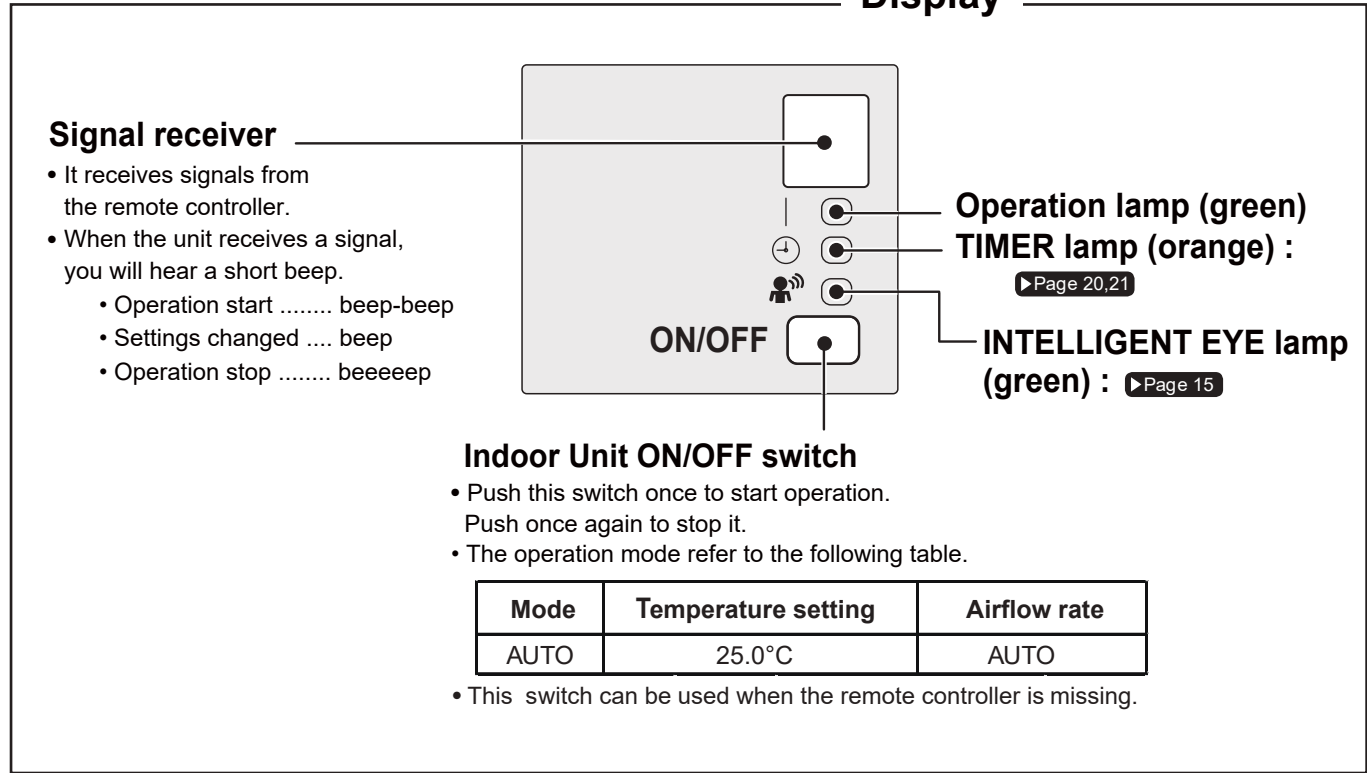


■ Open the front panel

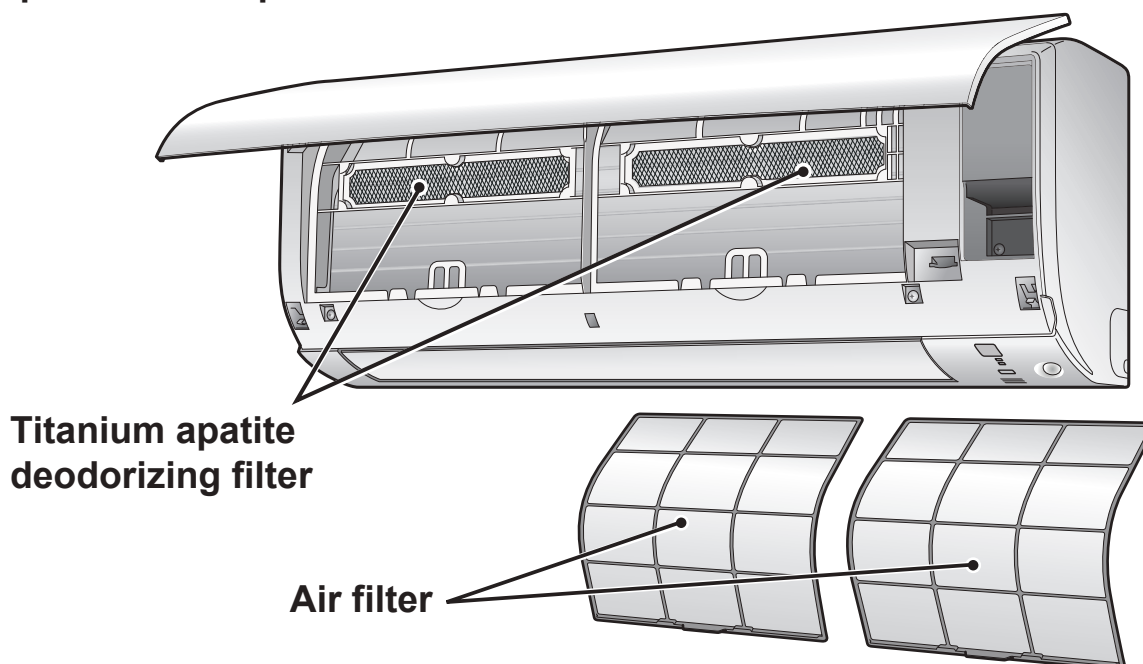


Outdoor Unit

■ For 25/35 class

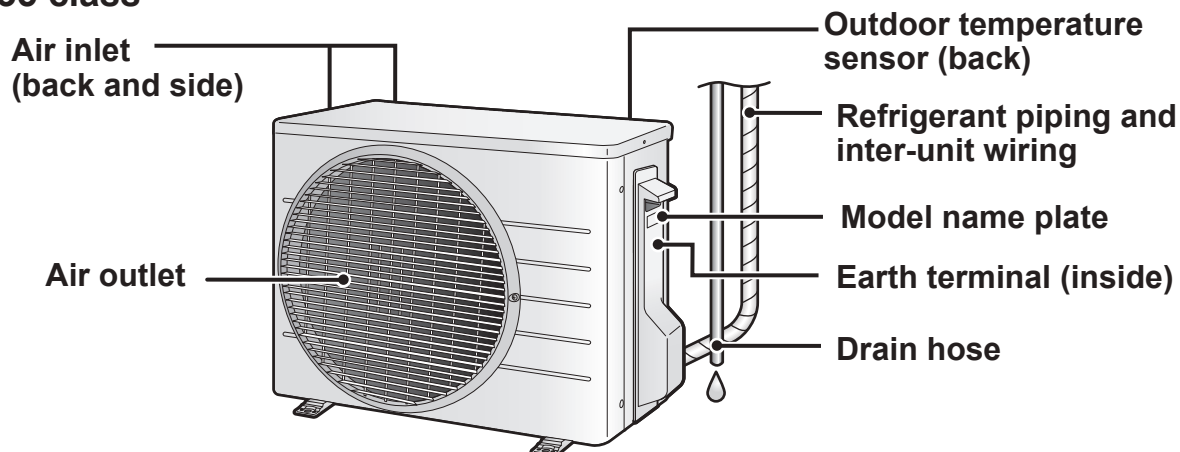


■ For 50 class

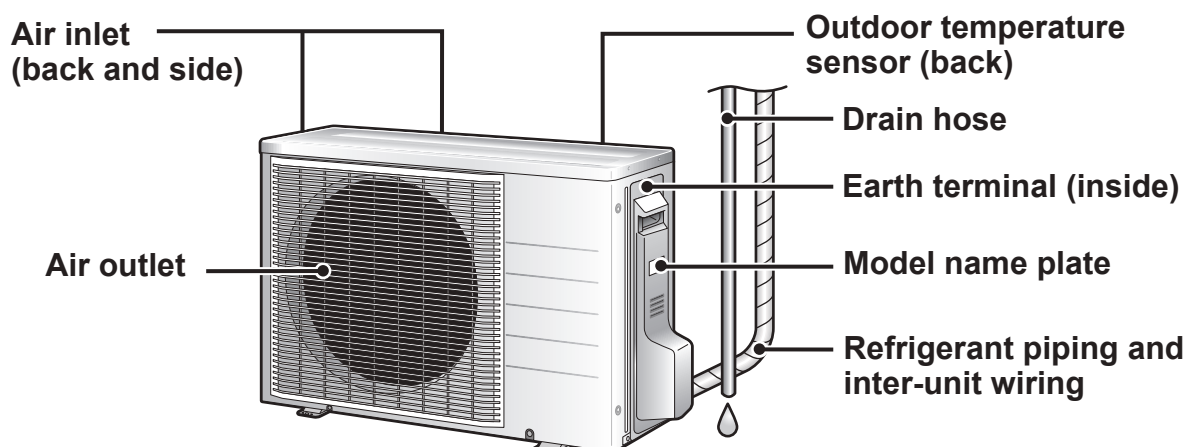

Name of Parts

Remote Controller

Signal transmitter



- To use the remote controller, aim the transmitter at the indoor unit. If there is anything to block signals between the unit and the remote controller, such as a curtain, the unit will not receive signals.
- Do not drop the remote controller.
- Do not get it wet.
- The maximum distance for communication is approx. 7m.

Direct operation buttons

- It start operation of the selected mode. (AUTO/DRY/COOL/HEAT/FAN ONLY)

▶ Page 9

TEMPERATURE adjustment buttons

- It changes the temperature setting.

▶ Page 10

SENSOR button

- INTELLIGENT EYE operation.

▶ Page 15

QUIET button

- OUTDOOR UNIT QUITE operation.

▶ Page 19

OFF TIMER button (Night set mode)

▶ Page 20

ON TIMER button

▶ Page 21

Display (LCD)

- It displays the current settings. (In this illustration, each section is shown with its displays on for the purpose of explanation.)

OFF button

- Press this button to stop operation.

▶ Page 9

FAN setting button

- It selects the airflow rate setting.

▶ Page 12

ECONO button

- ECONO operation.

▶ Page 18

POWERFUL button

- POWERFUL operation.

▶ Page 16

SWING button

- Adjusting airflow direction.

▶ Page 11

COMFORT AIRFLOW button


- COMFORT AIRFLOW operation.

▶ Page 13

TIMER CANCEL button



- It cancels the timer setting.

▶ Page 20,21

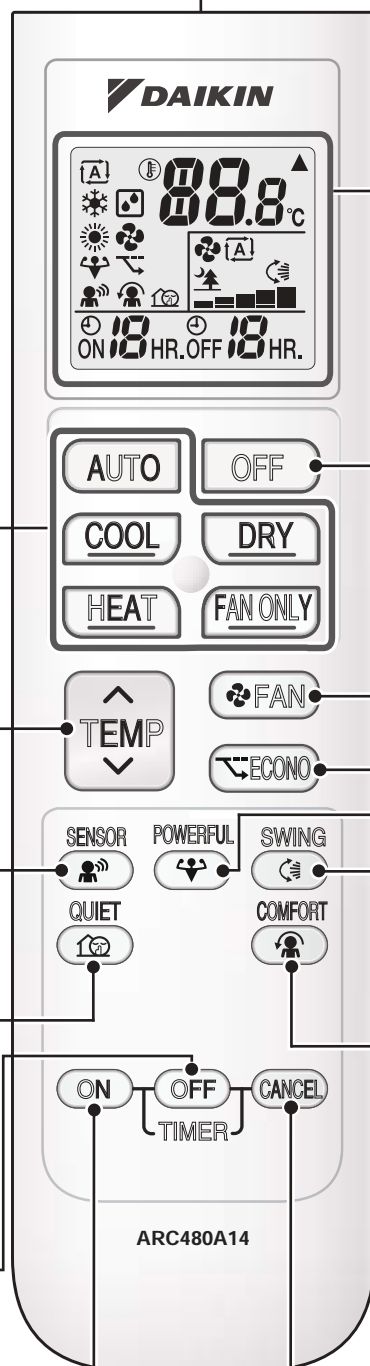

ARC480A14

Preparation before Operation

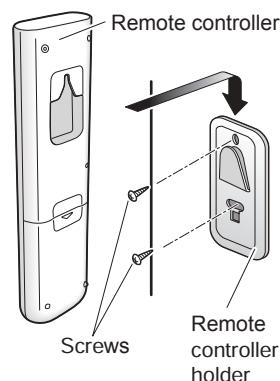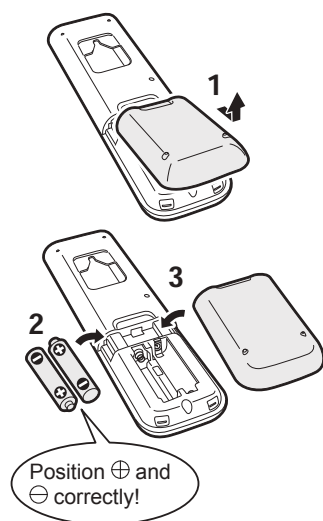

■ To set the batteries

1. Slide the back cover to take it off.
2. Set two dry batteries AAA.LR03 (alkaline).
3. Set the back cover as before.

■ To fix the remote controller holder on the wall

1. Choose a place from where the signals can reach the unit.
2. Fix the holder to a wall, a pillar, or similar location with the screws supplied with the accessory set.
3. Place the remote controller in the remote controller holder.

■ Turn the breaker on

- After the power is turned on, the flaps of the indoor unit opens and closes once to set the reference position.

NOTE

■ Notes on batteries

- When replacing the batteries, use batteries of the same type, and replace both old batteries together.
- When the system is not used for a long time, take the batteries off.
- The batteries will last for approx. 1 year. If the remote controller display begins to fade and the degradation of reception performance occurs within a year, however, replace both batteries with new, size AAA.LR03 (a kaline).
- The attached batteries are provided for the initial use of the system.
The usable period of the batteries may be short depending on the manufactured date of the air conditioner.

■ Low batteries alert

- To prevent remote controller from deteriorate batteries. When batteries seem to be dying (battery voltage lower).
The LCD will blink and the remote controller will stop all operations except to turn off the air conditioner.
To operate remote controller again, replace all the batteries with the new, size AAA. LR03 (Alkaline).

■ Notes on remote controller

- Never expose the remote controller to direct sunlight.
- Dust on the signal transmitter or receiver will reduce the sensitivity. Wipe off dust with soft cloth.
- Signal communication may be disabled if an electronic-starter-type fluorescent lamp (such as inverter-type lamps) is in the room. Consult the shop if that is the case.
- If the remote controller signals happen to operate another appliance, move that appliance to somewhere else, or consult the service shop.



AUTO · DRY · COOL · HEAT · FAN Operation



The air conditioner operates in the user selected operation mode.

■ To start operation

Press button of your desired operation mode.

AUTO operation

Press **AUTO** button. “**A**” appears on the LCD.

COOL operation

Press **COOL** button. “**❄**” appears on the LCD.

DRY operation

Press **DRY** button. “**☀**” appears on the LCD.

HEAT operation

Press **HEAT** button. “**☀**” appears on the LCD.

FAN ONLY operation

Press **FAN ONLY** button. “**🌀**” appears on the LCD.

- The OPERATION lamp lights green.



Display

- Operation mode can be change while operating by press your desired operation mode button.


■ To stop operation

Press **OFF**

- The OPERATION lamp goes off.

NOTE

MODE	Notes on each operation mode
HEAT	<ul style="list-style-type: none"> • Since this air conditioner heats the room by taking heat from outdoor air to indoors, the heating capacity becomes smaller in lower outdoor temperatures. If the heating effect is insufficient, it is recommended to use another heating appliance in combination with the air conditioner. • The heat pump system heats the room by circulating hot air around all parts of the room. After the start of HEAT operation, it takes some time before the room gets warmer.
COOL	<ul style="list-style-type: none"> • This air conditioner cools the room by releasing the heat in the room outside. Therefore, the cooling performance of the air conditioner may be decrease if the outdoor temperature is high.
DRY	<ul style="list-style-type: none"> • The computer chip works to rid the room of humidity while maintaining the temperature as much as possible. It automatically controls temperature and airflow rate, so manual adjustment of these functions is unavailable.
AUTO	<ul style="list-style-type: none"> • In AUTO operation, the system selects an appropriate operation mode (COOL or HEAT) based on the room and outside temperatures and starts the operation. • The system automatically reselects setting at a regular interval to bring the room temperature to user-setting level.
FAN	<ul style="list-style-type: none"> • This mode is valid for fan only.

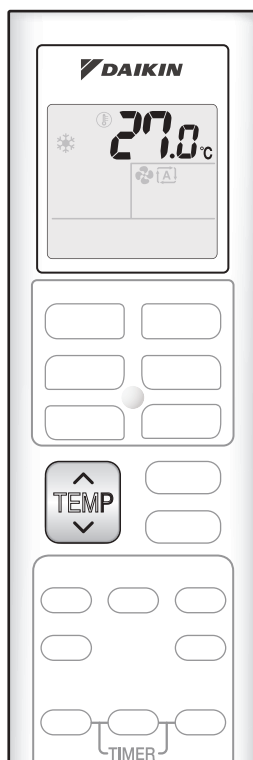

■ To change the temperature setting

Press .

- The displayed items on the LCD will change whenever either one of the buttons is pressed.

COOL operation	HEAT operation	AUTO operation	DRY or FAN ONLY operation
18.0-32.0°C	10.0-30.0°C	18.0-30.0°C	The temperature setting is not available.
Press ▲ to raise the temperature and press ▼ to lower the temperature 1.0°C each press.			

■ Operating conditions

■ Recommended temperature setting

- For cooling: 26.0-28.0°C
- For heating: 20.0-24.0°C

■ Tips for saving energy

- Be careful not to cool (heat) the room too much.
Keeping the temperature setting at a moderate level helps save energy.
- Cover windows with a blind or a curtain.
Blocking sunlight and air from outdoors increases the cooling (heating) effect.
- Clogged air filters cause inefficient operation and waste energy. Clean them once in about every 2 weeks.

■ Notes on the operating conditions


- The air conditioner always consumes a small amount of electricity even while it is not operating.
- If you are not going to use the air conditioner for a long period, for example in spring or autumn, turn the breaker off.
- Use the air conditioner in the following conditions.

MODE	Operating conditions	If operation is continued out of this range
COOL	Outdoor temperature : -10.0 ~ 46.0°C Indoor temperature : 18.0-32.0°C Indoor humidity : 80% max.	<ul style="list-style-type: none"> • A safety device may work to stop the operation. • Condensation may occur on the indoor unit and drip.
HEAT	Outdoor temperature : -15.0 ~ 24.0°C Indoor temperature : 10.0-30.0°C	<ul style="list-style-type: none"> • A safety device may work to stop the operation.
DRY	Outdoor temperature : -10.0 ~ 46.0°C Indoor temperature : 18.0-32.0°C Indoor humidity : 80% max.	<ul style="list-style-type: none"> • A safety device may work to stop the operation. • Condensation may occur on the indoor unit and drip.

- Operation outside this humidity or temperature range may cause a safety device to disable the system.



Adjusting the Airflow Direction

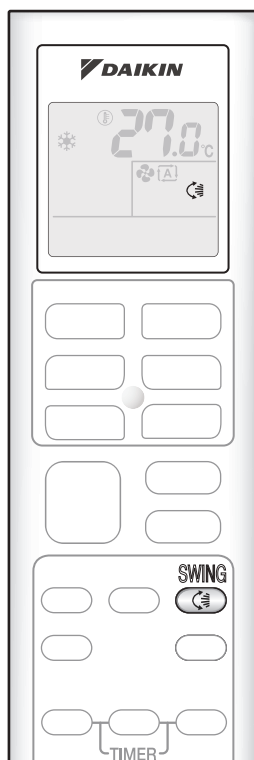



You can adjust the airflow direction to increase your comfort.

■ To start auto swing

Upper and lower airflow direction

Press .

- “” appears on the LCD.
- The flaps (horizontal blades) will begin to swing.



■ To set the flaps at desired position

- This function is effective while flaps are in auto swing mode.

Press  when the flaps the desired position.

- “” disappears from the LCD.


■ To adjust the louvers (vertical blades)

Hold the knob and move the louvers.

(You will find a knob on the left-side and the right-side blades.)

- When the unit is installed in the corner of a room, the direction of the louvers should be facing away from the wall.

If they face the wall, the wall will block off the wind, causing the cooling (or heating) efficiency to drop.

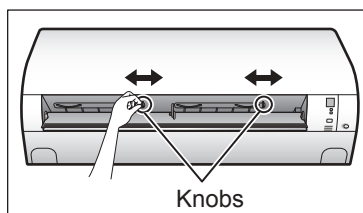

- There is a knob in 2 places.

NOTE


■ Notes on airflow direction setting

- The movable range of the flaps varies according to the operation mode.
- The flap will stop at the upper position when the airflow rate is changed to low during the up and down swing setting.

■ Note on airflow rate setting

- At smaller airflow rates, the cooling (heating) effect is also smaller.

Movable range of the flap



! CAUTION

- Always use a remote controller to adjust the angles of the flaps. If you attempt to move the flaps forcibly by hand when they are swinging, the mechanism may be broken.



Adjusting the Airflow Rate




You can adjust the airflow rate to increase your comfort.

■ To adjust the airflow rate setting

Press FAN .


- Each pressing of change the airflow rate setting in sequence shown below.

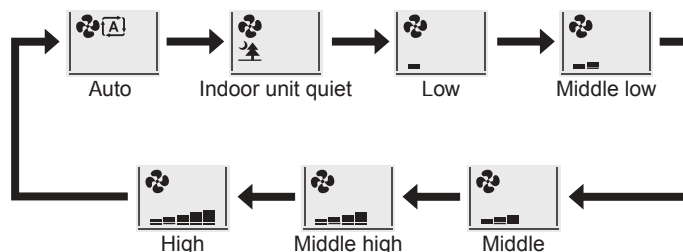

- When the airflow is set to “”, indoor unit quiet operation will start and the noise from the unit will become quieter.
- In indoor unit quiet operation, the airflow rate is set to a weak level.
- If the temperature dose not reach the desired point, change the airflow rate setting.
- In DRY mode, the airflow rate setting is not available.



COMFORT AIRFLOW Operation

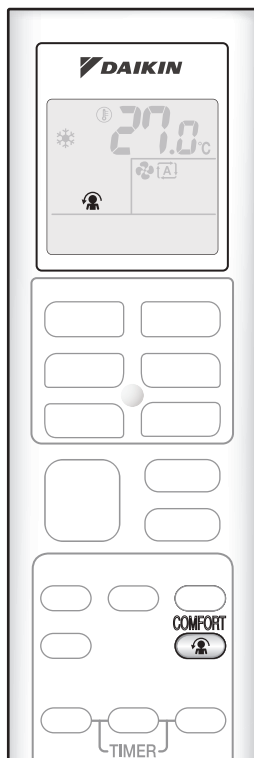

The air direction and flow rate are adjusted so that the air will not blow directly at people in the room.

■ To start COMFORT AIRFLOW operation


Press .

- “” is displayed on the LCD.

	COOL and DRY operation	HEAT operation	FAN ONLY operation
Flap direction	Goes up	Goes down	Not available
Airflow rate	AUTO		


■ To cancel COMFORT AIRFLOW operation

Press  again.


- “” disappears from the LCD.
- The flap will return to the memory position from before COMFORT AIRFLOW operation.

Notes on COMFORT AIRFLOW operation

- The flap position will change, preventing air from blowing directly on the occupants of the room.
- POWERFUL operation and COMFORT AIRFLOW operation cannot be used at the same time. Priority is given to the function of whichever button is pressed last.
- The airflow rate will be set to AUTO. If the upper and lower airflow direction is selected, the COMFORT AIRFLOW operation will be canceled.
- The flow of air will be in the upward direction while in COOL operation and in the downward direction while in HEAT operation, which will provide a comfortable wind that will not come in direct contact with people.

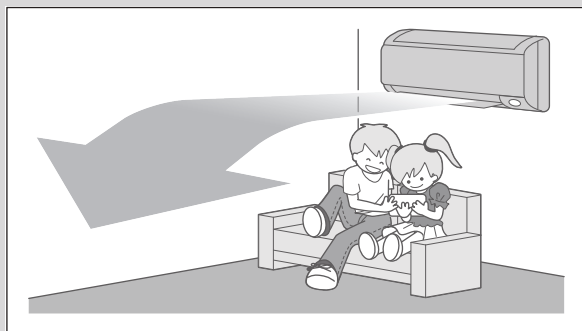

COOL operation

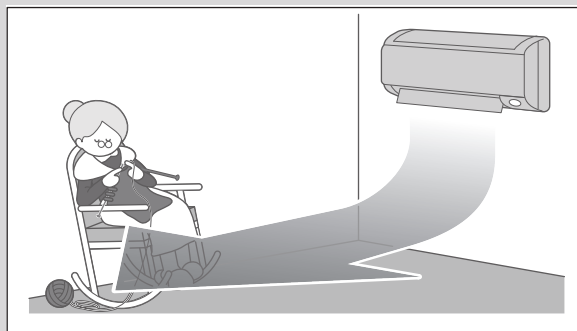

HEAT operation



INTELLIGENT EYE Operation


■ INTELLIGENT EYE operation

"INTELLIGENT EYE" is the infrared sensor which detects the human movement.

If no one is in the room for more than 20 minutes, the operation automatically changes to energy saving operation.

The INTELLIGENT EYE sensor according to the following situations.


[Example]



When somebody is in the sensing area
■ Normal operation

- The air conditioner is in normal operation while the sensor is detecting the movement of people.






When nobody in the sensing area
■ 20 minutes later, start energy saving operation.

- The set temperature is shifted in $\pm 2.0^{\circ}\text{C}$ steps.





Somebody back to the sensing area
■ Back to normal operation.

- The air conditioner will return to normal operation when the sensor detects the movement of people again.


INTELLIGENT EYE operation is useful for energy saving

■ Energy saving operation

- If no presence detected in the room for 20 minutes, the energy saving operation will start.
- This operation changes the temperature -2.0°C in HEAT / $+2.0^{\circ}\text{C}$ in COOL / $+2.0^{\circ}\text{C}$ in DRY operation from set temperature.
When the room temperature exceeds 30.0°C , the operation changes the temperature $+1.0^{\circ}\text{C}$ in COOL / $+1.0^{\circ}\text{C}$ in DRY operation from set temperature.
- This operation decreases the airflow rate slightly in FAN operation only.




INTELLIGENT EYE Operation

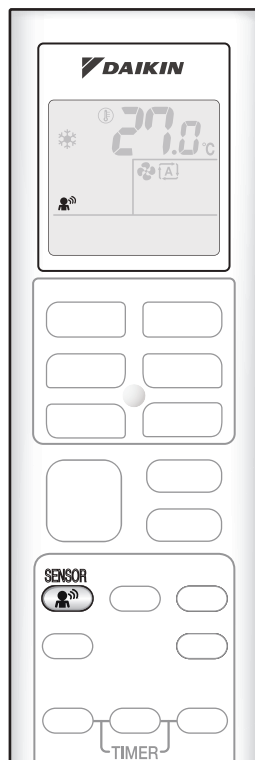


■ To start intelligent eye operation

Press .

- “” appears on the LCD.
- The INTELLIGENT EYE lamp lights green.




Display

- By selecting “” the air conditioner will be in INTELLIGENT EYE operation.
- The lamp will be lit while human movements are detected.

■ To cancel operation

Press  again.


- The INTELLIGENT EYE lamp goes off.
- “” disappears from the LCD.

NOTE


■ Notes on INTELLIGENT EYE operation

- Application range is as follows.

Vertical angle 90°
(Side view)



Horizontal angle 110°
(Top view)




- While the air conditioner is in INTELLIGENT EYE operation, if no people are detected in sensing area within 20 minutes, the air conditioner will go into energy-saving mode with the set temperature shifted by 2.0°C.
The air conditioner may go into energy-saving operation even if there are people in the area.
This may occur depending on the clothes the people are wearing if there are no movements of the people in the area.
- Due to the position of the sensor, people might be exposed to the airflow of the indoor unit if they are close to the front side of the indoor unit.
- Sensor may not detect moving objects further than 7m away. (Check the application range.)
- Sensor detection sensitivity changes according to indoor unit location, the speed of passersby, temperature range, etc.
- The sensor also mistakenly detects pets, sunlight, fluttering curtains and light reflected off of mirrors as passersby.
- INTELLIGENT EYE operation will not go on during POWERFUL operation.
- NIGHT SET mode [▶Page 20](#) will not go on during use of INTELLIGENT EYE operation.

⚠ CAUTION

- Do not place large objects near the INTELLIGENT EYE sensor.
Also keep heating units or humidifiers outside the sensor's detection area. This sensor can detect undesirable objects.
- Do not hit or violently push the INTELLIGENT EYE sensor. This can lead to damage and malfunction.




POWERFUL Operation

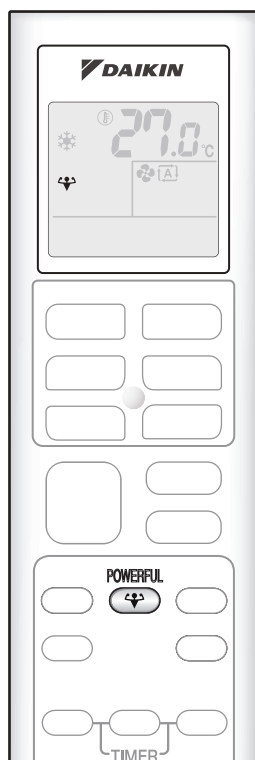

POWERFUL operation quickly maximizes the cooling (heating) effect in any operation modes. You can get the maximum capacity.

■ To start POWERFUL operation

Press  during operation.


- POWERFUL operation ends in 20 minutes. Then the system automatically operates again with the previous settings which were used before POWERFUL operation.
- “” appears on the LCD.

■ To cancel POWERFUL operation

Press  again.


- “” disappears from the LCD.

[Example]

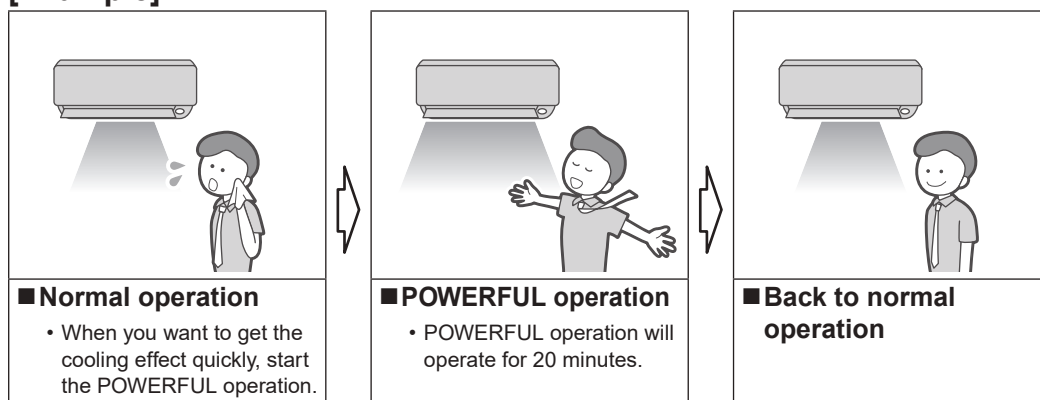

NOTE

■ Notes on POWERFUL operation

- When using POWERFUL operation, there are some functions which are not available.
- POWERFUL operation cannot be used together with ECONO or OUTDOOR UNIT QUIET operation. Priority is given to the function of whichever button is pressed last.
- POWERFUL operation can only be set when the unit is running. Pressing **OFF** causes the settings to be canceled, and “” disappears from the LCD.
- POWERFUL operation will not increase the capacity of the air conditioner if the air conditioner is already in operation with its maximum capacity demonstrated.
- **In COOL and HEAT operation**
To maximize the cooling (heating) effect, the capacity of outdoor unit is increased and the airflow rate is fixed to the maximum setting. The temperature and airflow settings are not available.
- **In DRY operation**
The temperature setting is lowered by 2.5°C and the airflow rate is slightly increased.
- **In FAN ONLY operation**
The airflow rate is fixed at the maximum speed.
- **In AUTO operation**
To maximize the cooling (heating) effect, the capacity of outdoor unit is increased and the airflow rate is fixed to the maximum setting. The temperature and airflow settings are not available.



ECONO Operation

■ ECONO operation

ECONO operation is a function which enables efficient operation by limiting the maximum power consumption value.

This function is useful for cases in which attention should be paid to ensure a circuit breaker will not trip when the product runs alongside other appliances.


[Example]

Normal operation




- In case the air conditioner and other appliances which require high power consumption are used at same time, a circuit breaker may trip if the air conditioner operate with its maximum capacity.

ECONO operation

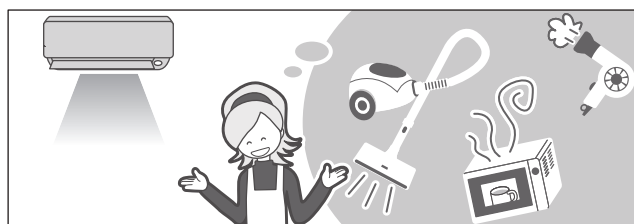


- The maximum power consumption of the air conditioner is limited by using ECONO operation. The circuit breaker will hardly trip even if the air conditioner and other appliances are used at same time.

Running current and power consumption

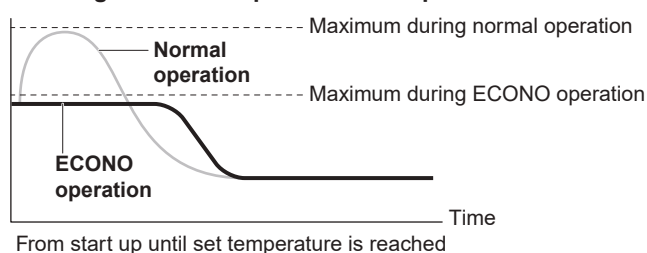


- This diagram is a representation for illustrative purposes only. The maximum running current and power consumption of the air conditioner in ECONO operation vary with the connecting outdoor unit.

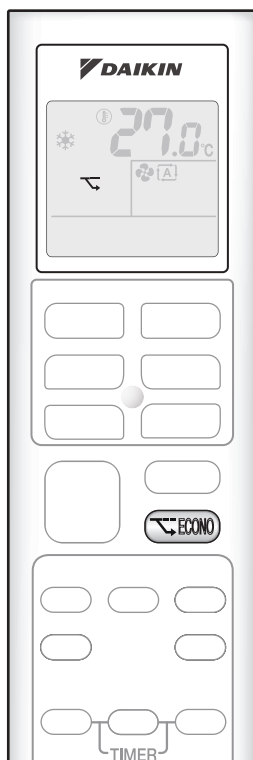


■ To start ECONO operation

Press .

- “” appears on the LCD.



■ To cancel ECONO operation

Press  **again.**

- “” disappears from the LCD.

NOTE

■ Notes on ECONO operation


- ECONO operation can only be set when the unit is running. Pressing  causes the settings to be canceled, and “” disappears from the LCD.
- ECONO operation is a function which enables efficient operation by limiting the power consumption of the outdoor unit (operating frequency).
- ECONO operation functions in AUTO, COOL, DRY, and HEAT operation.
- POWERFUL and ECONO operation cannot be used at the same time.
Priority is given to the function of whichever button is pressed last.
- If the level of power consumption is already low, ECONO operation will not drop the power consumption.



OUTDOOR UNIT QUIET Operation

■ OUTDOOR UNIT QUIET operation

OUTDOOR UNIT QUIET operation lowers the noise level of the outdoor unit by changing the frequency and fan speed on the outdoor unit. This function is convenient during the night.

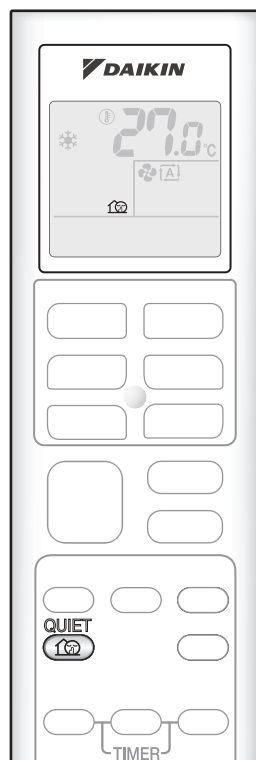

■ To start operation

Press .


- “” appears on the LCD.

■ To cancel operation

Press  again.

- “” disappears from the LCD.


[Example] Using the OUTDOOR UNIT QUIET operation during the night.

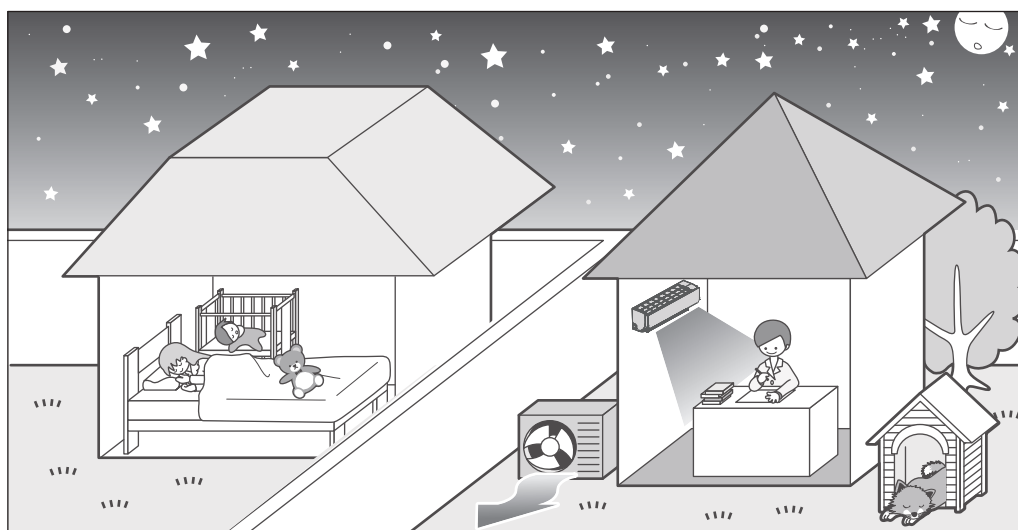

- The noise level of the outdoor unit will be lower. This function is useful when you need to consider the noise for your neighbourhood.


NOTE

■ Notes on OUTDOOR UNIT QUIET operation

- This function is available in COOL, HEAT, and AUTO operation.
This is not available in FAN and DRY operation.
- POWERFUL operation and OUTDOOR UNIT QUIET operation cannot be used at the same time.
Priority is given to the function of whichever button is pressed last.
- Even the operation is stopped by using the remote controller or the indoor unit ON/OFF switch
when using OUTDOOR UNIT QUIET operation, “” will remain on the remote controller display.
- OUTDOOR UNIT QUIET operation will drop neither the frequency nor fan speed if they have been already dropped low enough.

OFF

OFF TIMER Operation

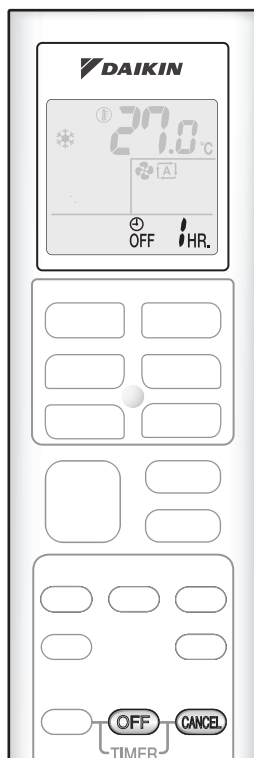

Timer functions are useful for automatically switching the air conditioner on or off at night or in the morning. You can also use OFF TIMER and ON TIMER in combination.


■ To use OFF TIMER operation

1. Press **OFF**.

 • “ OFF  HR.” is display on the LCD.

2. Press **OFF** until the time setting reaches the point



- Each pressing of button increases the time setting by 1 hour.
- Setting time can be increase to 12 hours maximum.
- The TIMER lamp lights orange.



Display

■ To cancel OFF TIMER operation

Press **CANCEL**.

- “ OFF  HR.” disappear from the LCD.
- The TIMER lamp goes off.

NOTE

■ Notes on TIMER operation


- When operating the unit via the ON/OFF TIMER, the actual length of operation may vary from the time entered by the user. (Maximum approx. 10 minutes)

■ NIGHT SET mode

- When the OFF TIMER is set, the air conditioner automatically adjusts the temperature setting (0.5°C up in COOL, 2.0°C down in HEAT) to prevent excessive cooling (heating) for your pleasant sleep.

ON

ON TIMER Operation

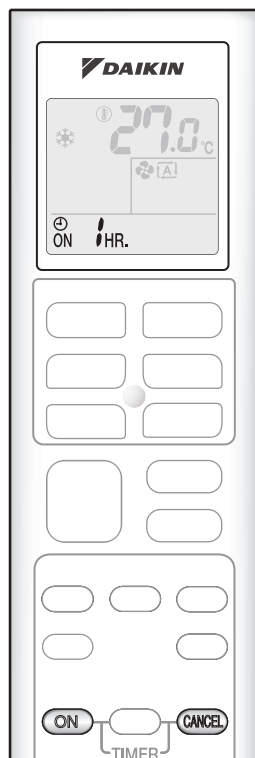


■ To use ON TIMER operation

1. Press **ON**.

 **ON**  • “  **ON**  ” is display on the LCD.

2. Press **ON** until the time setting reaches the point you prefer.



- Each pressing of button increases the time setting by 1 hour.
- Setting time can be increase to 12 hours maximum.
- The TIMER lamp lights orange.



Display

■ To cancel ON TIMER operation

Press **CANCEL**.

- “  **ON**  ” disappear from the LCD.
- The TIMER lamp goes off.


■ To combine ON TIMER and OFF TIMER

- A sample setting for combining the 2 timers is shown below.

- When setting while unit is operating.

(Example)



Turn off unit in the next 1 hr.) Combined
Turn on unit in the next 8 hr. (7 hr. after turn off)

 **ON** **8** HR.  **OFF** **1** HR.

- When setting while unit is stopped.

(Example)

Turn on unit in the next 2 hr.) Combined
Turn off unit in the next 5 hr. (3 hr. after turn on)

 **ON** **2** HR.  **OFF** **5** HR.

NOTE

■ In the following cases, set the timer again.

- After a breaker has turned off.
- After a power failure.
- After replacing batteries in the remote controller.


Care and Cleaning

■ Quick reference

How to open / close the front panel

- Hold the front panel by the panel tabs on the both sides and open it.
- Press the front panel at both sides and the center to close it.

Cleaning parts

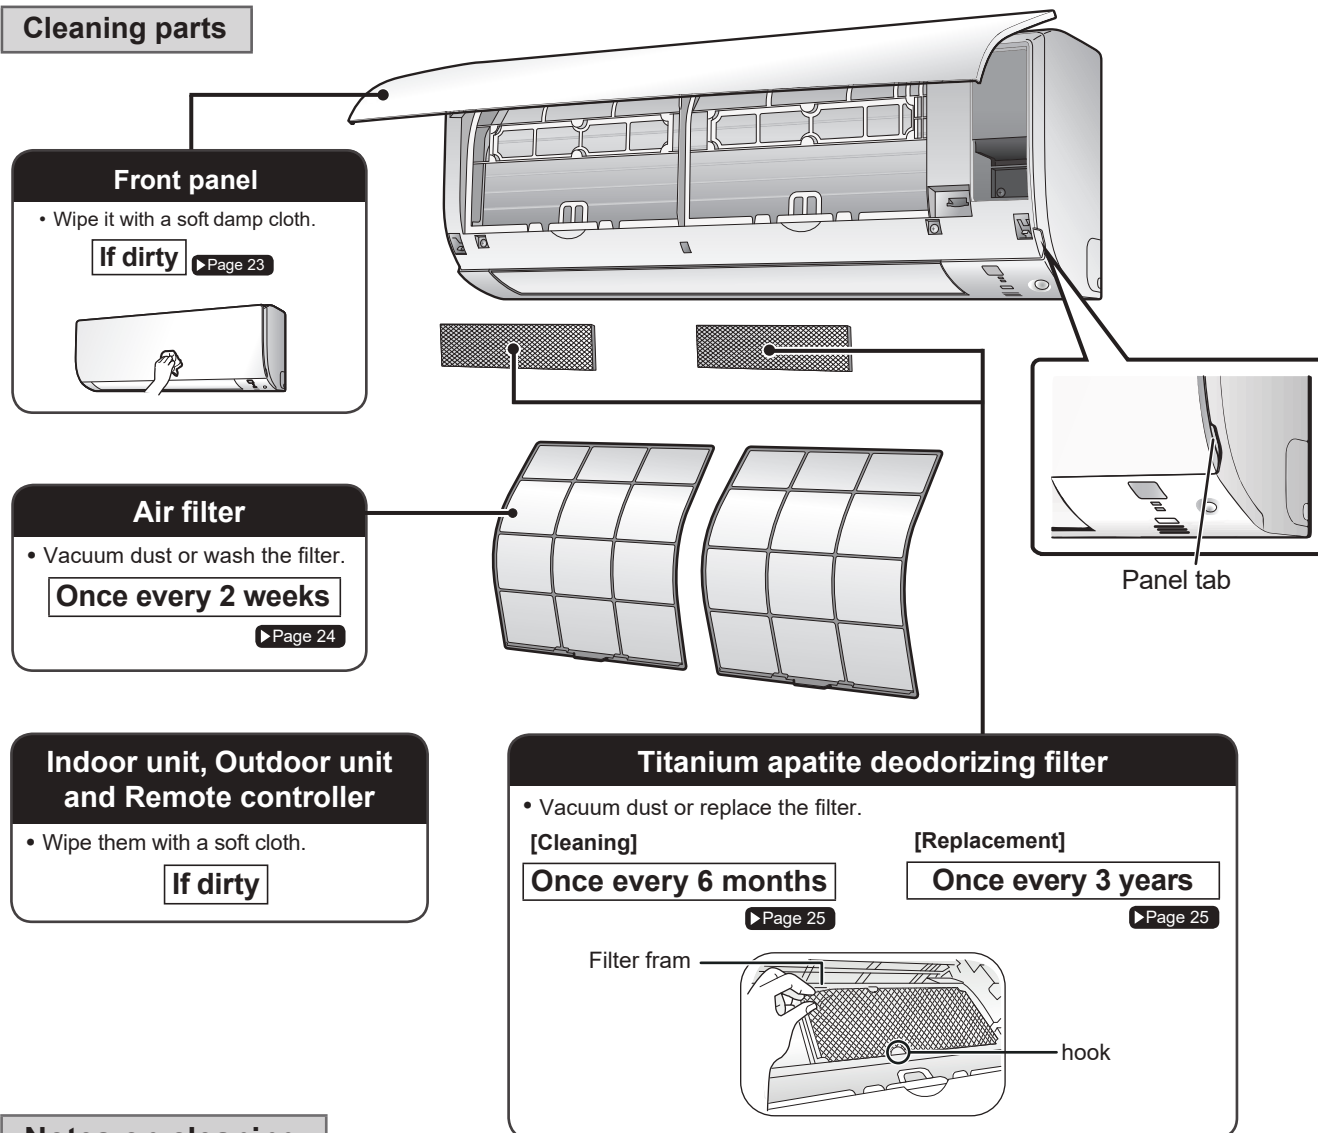

Notes on cleaning

■ For cleaning, do not use the materials as follows.

- Hot water above 40.0°C.
- Benzine, gasoline, thinner, other volatile oils.
- Polishing compound.
- Scrubbing brushes, other hard stuff.



⚠ CAUTION


- Before cleaning, be sure to stop the operation and turn the breaker off.
- Do not touch the aluminium fins of the indoor unit. If you touch those parts, this may cause an injury.

■ Front panel

1. Remove the front panel.

- Open the front panel.
- Slide the front panel to either the left or right and pulling it toward you.
This will disconnect the front panel shaft on one side.

- Disconnect the front panel shaft on the other side in the same manner.

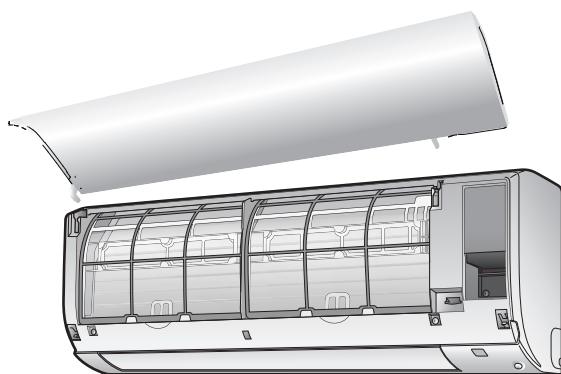

2. Clean the front panel.

- Wipe it with a soft cloth soaked in water.
- Only neutral detergent may be used.
- In case of washing the panel with water, wipe it with dry soft cloth, dry it up in the shade after washing.

3. Attach the front panel.

- Align the front panel shaft on the left and right of the front panel with the slots, then push them all the way in.

- Close the front panel slowly. (Press the panel at both sides and in the central area.)

CAUTION

- When removing or attaching the front panel, use a robust and stable stool and watch your steps carefully.
- When removing or attaching the front panel, support the panel securely with hand to prevent it from falling.
- After cleaning, make sure that the front panel is securely fixed.

```
ERROR: undefined  
OFFENDING COMMAND: 1.#NAN
```

```
STACK:
```